

**(12) PATENT APPLICATION**  
**(19) AUSTRALIAN PATENT OFFICE**

**(11) Application No. AU 200176077 A1**

(54) Title  
**Multiple battery management system**

(51)<sup>7</sup> International Patent Classification(s)  
**H02J 007/00 A61F 002/18**

(21) Application No: **200176077**

(22) Application Date: **2001.09.26**

(30) Priority Data

(31) Number	(32) Date	(33) Country
<b>PR0366</b>	<b>2000.09.26</b>	<b>AU</b>

(43) Publication Date : **2002.03.28**

(43) Publication Journal Date : **2002.03.28**

(71) Applicant(s)  
**Cochlear Limited**

(72) Inventor(s)  
**Peter Single**

(74) Agent/Attorney  
**F B RICE and CO,605 Darling Street,BALMAIN NSW 2041**


## ABSTRACT

A power management system for a power supply (43) providing power to electrical equipment, such as a totally implantable cochlear implant (40). The power supply (43) can comprise a first rechargeable battery and at least one further rechargeable battery that each independently provide power to the implant (40) through a switching means. The management system comprises a management means for controlling the operation of the switching means to place the system in a first state where the implant (40) can draw power from only the first battery or at least in a further state where the implant (40) can draw power from only said at least one further battery.

5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
221

3709001 78073

1/3

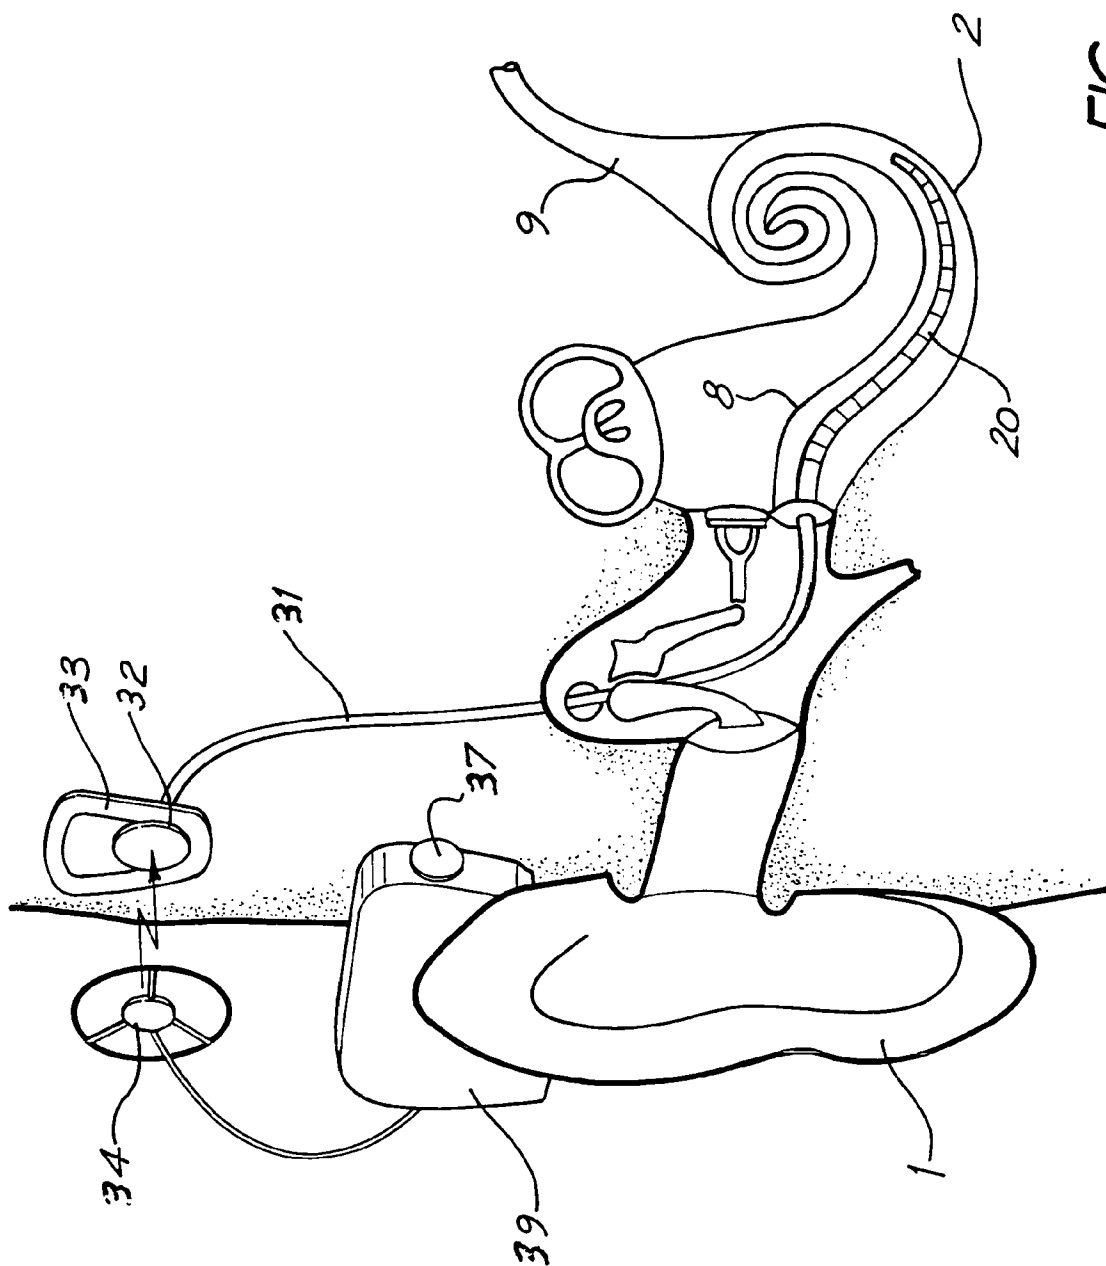

**AUSTRALIA**

**Patents Act 1990**

**Cochlear Limited**

**ORIGINAL**

**COMPLETE SPECIFICATION  
STANDARD PATENT**

*Invention Title:*

*Multiple battery management system*

The following statement is a full description of this invention  
including the best method of performing it known to us:-

### Field of the Invention

The present invention relates to a power supply for an implant, such as a cochlear implant, and in particular, to a power supply having a plurality of rechargeable batteries and a management system for controlling the use of the  
5 batteries by the implant.

### Background Art

Hearing loss, which may be due to many different causes, is generally of two types, conductive and sensorineural. Of these types, conductive hearing loss occurs where the normal mechanical pathways for sound to  
10 reach the hair cells in the cochlea are impeded, for example, by damage to the ossicles. Conductive hearing loss may often be helped by use of conventional hearing aid systems, which amplify sound so that acoustic information does reach the cochlea and the hair cells.

In many people who are profoundly deaf, however, the reason for  
15 deafness is sensorineural hearing loss. This type of hearing loss is due to the absence of, or destruction of, the hair cells in the cochlea which transduce acoustic signals into nerve impulses. These people are thus unable to derive suitable benefit from conventional hearing aid systems, because there is damage to or absence of the mechanism for nerve impulses to be generated  
20 from sound in the normal manner.

It is for this purpose that cochlear implant systems have been developed. Such systems bypass the hair cells in the cochlea and directly deliver electrical stimulation to the auditory nerve fibres, thereby allowing the brain to perceive a hearing sensation resembling the natural hearing  
25 sensation normally delivered to the auditory nerve. US Patent 4532930, the contents of which are incorporated herein by reference, provides a description of one type of traditional cochlear implant system.

Cochlear implant systems have typically consisted of two key components, namely an external component commonly referred to as a  
30 processor unit, and an implanted internal component commonly referred to as a stimulator/receiver unit. Traditionally, both of these components have cooperated together to provide the sound sensation to an implantee.

The external component has traditionally consisted of a microphone for detecting sounds, such as speech and environmental sounds, a speech  
35 processor that converts the detected sounds and particularly speech into a

coded signal, a power source such as a battery, and an external antenna transmitter coil.

The coded signal output by the speech processor is transmitted transcutaneously to the implanted stimulator/receiver unit situated within a  
 5 recess of the temporal bone of the implantee. This transcutaneous transmission occurs through use of an inductive coupling provided between the external antenna transmitter coil which is positioned to communicate with an implanted antenna receiver coil provided with the stimulator/receiver unit. This communication serves two essential purposes, firstly to  
 10 transcutaneously transmit the coded sound signal and secondly to provide power to the implanted stimulator/receiver unit. Conventionally, this link has been in the form of a radio frequency (RF) link, but other such links have been proposed and implemented with varying degrees of success.

The implanted stimulator/receiver unit typically includes the antenna  
 15 receiver coil that receives the coded signal and power from the external processor component, and a stimulator that processes the coded signal and outputs a stimulation signal to an intracochlea electrode assembly which applies the electrical stimulation directly to the auditory nerve producing a hearing sensation corresponding to the original detected sound.

20 The external componentry of the cochlear implant has been traditionally carried on the body of the implantee, such as in a pocket of the implantee's clothing, a belt pouch or in a harness, while the microphone has been mounted on a clip mounted behind the ear or on a clothing lapel of the implantee.

25 More recently, due in the main to improvements in technology, the physical dimensions of the speech processor have been able to be reduced allowing for the external componentry to be housed in a small unit capable of being worn behind the ear of the implantee. This unit has allowed the microphone, power unit and the speech processor to be housed in a single  
 30 unit capable of being discretely worn behind the ear, with the external transmitter coil still positioned on the side of the implantee's head to allow for the transmission of the coded sound signal from the speech processor and power to the implanted stimulator unit.

This need for a transmitter coil further requires leads and additional  
 35 componentry which add to the complexity of such systems as well as being quite noticeable. Nevertheless, the introduction of a combined unit capable

of being worn behind the ear has greatly improved the visual and aesthetic aspects for cochlear implant implantees and provided a degree of freedom of movement for implantees that had previously not been possible with body worn devices.

5 While traditional cochlear implants have proven very successful in restoring hearing sensation to many people, the construction of the conventional implant with its external electronic components has limited the circumstances in which the implant can be used by a implantee. For example, implantees cannot wear the devices while showering or engaging in  
10 water-related activities. Most implantees also do not use the devices whilst asleep due to discomfort and the likelihood that the alignment between the external transmitter coil and the internal receiver coil will be lost due to movements during sleep. Therefore, with the increasing desire of cochlear implant implantees to lead a life that is the equivalent of a naturally hearing  
15 person, there exists a need to provide a system which allows for total freedom with improved simplicity and reliability.

Because of this need, fully implantable systems that do not require external componentry for operation have been postulated. One type of system which has been proposed is described in US Patent No 6067474 by  
20 Advanced Bionics Corporation and Alfred E Mann Foundation for Scientific Research. This system attempts to provide all system components implanted in the implantee, and includes a microphone placed in the ear canal which communicates with a conventionally positioned stimulator unit via a conventional RF link. There is further described a battery unit which can be  
25 integral with the stimulator unit or separate therefrom. Such a system provides further complications as it requires surgical implantation of a number of components and hence complicates the surgical procedure. The system also maintains the need for an RF link during normal operation between implanted components which increases overall power requirements  
30 of the system and unnecessarily drains the internal battery supply. Also, such a system requires multiple implanted casings and the necessity for communications between internal components thereby increasing the likelihood of system failure due to component malfunction. In the event of a system malfunction, the procedure required to correct such a device failure  
35 becomes further complicated due to the number of implanted components and the complex communication channels between all components.

The present applicant has also proposed a totally implanted cochlear implant system in International Application No PCT/AU01/00769. This system has the advantage that all of the components are provided in a single unit that is able to be implanted by conventional surgical procedures.

- 5 A problem with totally implanted system is that the systems are reliant on power sourced from rechargeable power sources implanted with the implant. A well understood problem with rechargeable batteries is that the batteries can only undergo a particular maximum number of recharging cycles before the performance of the battery degrades to a level where the
- 10 battery is essentially unusable. A further problem with rechargeable batteries is that if they are discharged before being fully charged, or conversely, are charged before being fully discharged, their overall capacity may be reduced. When such batteries are implanted, all means should be undertaken to maximise the battery's operating life as the replacement of such batteries
- 15 requires a surgical procedure.

- These problems are further compounded by the fact that in cochlear implant applications, the recharging process for the implanted power source is heavily reliant on the implantee's ability to dedicate a particular amount of their time to recharge the internal power source when necessary. This
- 20 requires the implantee to closely monitor the charge status of their system and ensure that the power source is recharged only when the battery has been fully discharged. Therefore, such an onus can impinge greatly on the implantee's lifestyle, thereby reducing the implantee's freedom to use such a totally implanted device, which is one of the great benefits of providing a
- 25 totally implanted device in the first instance.

It is therefore an object of the present invention to provide a system designed to maximise the performance of batteries installed in totally implanted cochlear implants and other implants that may rely on battery power.

- 30 It is a further object of the present invention to provide an internal power management system that ensures that the charging/recharging cycles of the implanted device occur with minimal interruption to the implantee's regular lifestyle and with minimal input from the implantee.

- Any discussion of documents, acts, materials, devices, articles or the
- 35 like which has been included in the present specification is solely for the purpose of providing a context for the present invention. It is not to be taken



as an admission that any or all of these matters form part of the prior art base or were common general knowledge in the field relevant to the present invention as it existed in Australia before the priority date of each claim of this application.

5 Summary of the Invention

Throughout this specification the word "comprise", or variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated element, integer or step, or group of elements, integers or steps, but not the exclusion of any other element, integer or step, or group of elements,

10 integers or steps.

According to a first aspect, the present invention is a power management system for a power supply providing power to electrical equipment, the power supply comprising a first rechargeable battery and at least one further rechargeable battery, with each battery independently

15 providing power to the electrical equipment through a switching means, wherein the management system comprises a management means for controlling the operation of the switching means to place the system in a first state where the electrical equipment draws power from only the first battery or at least in a further state where the electrical equipment draws power from  
20 only said at least one further battery.

In one embodiment of this aspect, the switching means is operable by the management means to place the system in another state where the electrical equipment does not or cannot draw power from the first battery or said at least one further battery of the power supply. The management means  
25 will typically operate the switching means to place the power supply in said another state when another power source is available for the electrical equipment. An example of another power source may comprise an external power source.

In one embodiment, the switching means is adapted to ensure that  
30 when the first battery is in electrical communication with the electrical equipment, said at least one further battery is not in electrical communication with that equipment receiving power from the first battery, and vice versa. The switching means can comprise a switch that switches an electrical conductor extending to the electrical equipment from being in electrical  
35 communication with an output of the first battery to an output of said at least one further battery, and vice versa. When the system is in said another state,

the switch can ensure the electrical conductor is not in electrical communication with the outputs of the batteries.

In a further embodiment, the management means only allows power to be drawn from a battery after that battery has been fully charged or reached a pre-determined maximum level of charge. It is also preferred, that the management means only allows a battery to be charged after that battery has reached a predetermined minimum level of charge. For example, the management means may only allow a battery to be recharged once it has been fully discharged.

In a further embodiment, when the power supply is in the first state, said at least one further battery can be recharged. It will be appreciated that recharging of said at least one further battery will be only be possible if a battery charger is available for connection to said at least one further battery. Conversely, when the power supply is in the further state, the first battery can be recharged. Again, recharging of the first battery will only be possible if the battery charger is available for connection to the first battery.

One example of the electrical equipment is a tissue-stimulating prosthesis adapted for implant in an implantee's body, such as a cochlear implant.

According to a second aspect, the present invention is a power management system for a power supply providing power to a cochlear implant, the power supply comprising a first rechargeable battery and at least one further rechargeable battery, with each battery independently providing power to the cochlear implant through a switching means, wherein the management system comprises a management means for controlling the operation of the switching means to place the system in a first state where the cochlear implant draws power from only the first battery or at least in a further state where the cochlear implant draws power from only said at least one further battery.

According to a third aspect, the present invention is a power management system for a power supply providing power to electrical equipment, the power supply comprising a first rechargeable battery and at least one further rechargeable battery, with each battery independently providing power to the electrical equipment through a switching means, the management system comprising a management means for controlling the operation of the switching means to place the system in a first state where the

electrical equipment draws power from only the first battery or at least in a further state where the electrical equipment draws power from only said at least one further battery, and wherein when the system is in said first state, said at least one further battery is rechargeable, and when the system is in  
5 said second state, said first battery is rechargeable.

According to a fourth aspect, the present invention is a power management system for a power supply providing power to electrical equipment, the power supply comprising a first rechargeable battery and at least one further rechargeable battery, with each battery independently  
10 providing power to the electrical equipment through a switching means, the management system comprising a management means for controlling the operation of the switching means to place the system in a first state where the electrical equipment draws power from only the first battery or at least in a further state where the electrical equipment draws power from only said at  
15 least one further battery, and wherein the management means only allows power to be drawn from one of said first battery and said at least one further battery after said one battery has been fully charged or has a pre-determined maximum level of charge.

In this aspect, the management means preferably only allows one of  
20 said first and said at least one further batteries to be charged after that battery has reached a predetermined minimum level of charge.

According to a further aspect, the present invention is an implantable tissue-stimulating prosthesis that draws electrical power from a power supply that is implantable with or in the prosthesis, the power supply including a  
25 first rechargeable battery and at least one further rechargeable battery. The prosthesis can have a management system as defined herein.

In one embodiment, the tissue-stimulating prosthesis can comprise a cochlear implant. The cochlear implant can preferably operate in a stand alone mode or in concert with an externally mounted device. The externally  
30 mounted device can include a sound processor, such as a speech processor, and/or an external power supply. The cochlear implant preferably includes a sensing means that senses when the externally mounted device, incorporating an external power supply, is brought into use. On sensing of the availability of the external power supply by the sensing means, the  
35 cochlear implant preferably draws all of its electrical power requirement from the external supply. The sensing means can preferably detect removal of the

external power supply and provide a suitable output to the cochlear implant that instructs it to draw power from the internal implanted power supply, if power is available.

In a further embodiment, the tissue-stimulating prosthesis can  
 5 comprise a totally implantable cochlear implant system such as is described in International Application No PCT/AU01/00769, the contents of which are incorporated by way of reference. For the purposes of the description provided below, reference will be made to the prosthesis in the form of a cochlear implant. It is to be appreciated that the following description could  
 10 apply, with appropriate modification, to other systems adapted for implantation in the body.

The totally implantable cochlear implant system described in International Application No PCT/AU01/00769 is preferably adapted to be implanted in the mastoid bone adjacent the ear of the implantee that is to  
 15 receive the implant. The system includes a microphone that detects external sounds and outputs acoustic signals representative of detected sounds, a processor means that receives the acoustic signals and converts the signals, particularly signals representative of speech, into stimulation signals representative of the detected sounds and an electrode array suitable for  
 20 insertion in the cochlea of an implantee that receives the stimulation signals and transmits electrical stimulations to the implantee's auditory nerves. The electrode array can be any type known in the art, such as that described in US 4532930.

In a preferred embodiment of the invention, the power supply includes  
 25 only the first battery and one of said at least one further batteries, ie. a second rechargeable battery. Again, for the purposes of the description that follows, reference will be made to the power supply as having only two batteries. It will be appreciated that the power supply could incorporate a third rechargeable battery or even a higher number and that the description that  
 30 follows is equally applicable, with appropriate modification, to such systems.

In a further embodiment, only one of the rechargeable batteries of the implanted power supply can be used to provide power to the implant at any one time. The power supply preferably includes a power supply management means that determines which battery is used to power the implant, if at all, at  
 35 any particular time.

The management means is preferably adapted such that if the first battery is powering the implant, the second battery is not used to provide power to the implant. Still further, it is preferred that if the second battery is powering the implant, the management means prevents the first battery from  
5 providing power to the implant.

In yet a further embodiment, the management means further comprises a charge monitoring means that monitors the charge in the first and second batteries. When one of the batteries is being used to provide power to the implant, for example the first battery, the monitoring means can monitor the  
10 charge in this battery. When the charge of the first battery reaches a predetermined minimum level, or is fully discharged, the monitoring means can output a signal indicative that the charge has reached this minimum level. This output signal can be provided to the management means which operates a switching means that switches the power supply for the implant  
15 from the first battery to the second battery. The use of the management means can be used to ensure a continuous source of power for the implant without intervention by the implantee.

At the same time that the monitoring means is monitoring the first battery, it can also monitor the charge in the second battery. If the charge in  
20 the second battery is also monitored by the monitoring means to be below a predetermined level or fully discharged, the management means can instead of operating switching means begin shut-down of the implant.

When in use, the first or second battery preferably provides power for the microphone, processor means, electrode array and any other electrical or  
25 electronic componentry of the implant system.

When the monitoring means detects that the charge in the first battery has reached a predetermined minimum level or is approaching full discharge, and there is no charge in the second battery, the monitoring means preferably outputs a signal that causes the management means to generate a warning  
30 indication to the implantee that the power supply of the implant needs recharging. The warning system may generate a unique stimulus signal that the implantee is trained to recognise as indicative that the power supply needs recharging. For example, the implant may output a sound that the implantee is trained to understand as being indicative that the power supply  
35 needs recharging.

In another embodiment, the management system can further comprise an interrogation means that allows the implantee to determine the measured charge levels noted by the monitoring means of the power supply.

In one embodiment, the power supply can be mounted within a case  
 5 that also encloses the componentry of the electrical equipment, such as the processor means of the cochlear implant. In another embodiment, the power supply can be mounted within a separate case with electrical connection provided between the batteries and the componentry, such as the processor means. Where the power supply is mounted in a separate case, the electrical  
 10 connection is preferably disconnectable to allow removal of the power supply case, or at least the batteries, from the implantee if required.

The first and said at least one further batteries can comprise Lithium-Ion cells. It will be appreciated that any suitable battery cell could be utilised in the present invention. Both the first and second batteries are also  
 15 preferably surrounded by an electrically insulating material such that the batteries are electrically insulated from the case in which they are mounted.

The cochlear implant system preferably also includes a wire antenna coil that is also implanted within the implantee. The antenna coil is preferably comprised of at least two, and preferably at least 3, turns of  
 20 electrically insulated platinum or gold wire tuned to parallel resonance. The electrical insulation of the antenna coil can be provided by a flexible silicone moulding and/or silicone or polyurethane tubing. The antenna coil is preferably external of the case surrounding the processor means. The antenna coil is disposed about a centrally located magnet. The magnet can  
 25 comprise a rare earth permanent magnet hermetically sealed within a titanium case. The magnet within its case is preferably held in the centre of the antenna coil by the silicone moulding surrounding the antenna coil. In a preferred embodiment, the magnet is removable from the system so as to allow the implantee to undergo magnetic resonance imaging (MRI) scanning.  
 30 Electrical connection between the coil and the componentry within the case can be provided by two hermetic and insulated ceramic feedthroughs or an electrical connector. The ceramic feedthroughs can be formed using the method described in US Patent 5046242, the contents of which are incorporated herein by reference. The coil can act as an RF link to allow  
 35 bidirectional data transfer between the system and external componentry thereby allowing the system to function as a conventional cochlear implant

system if necessary. The coil also importantly acts a power receiver to allow inductive charging of the power supply.

A battery charging means that is mounted external to the body of the implantee can be used to recharge the batteries of the power supply. Where  
 5 the prosthesis is a cochlear implant having an implanted antenna coil, the battery charging means also includes an antenna coil that through use of the inductive link formed by bringing the implanted coil and the external coil adjacent each other, allows the implanted power supply to be recharged.

In a further embodiment, the battery charging means can be part of an  
 10 external device having functions other than that of just charging the implanted power supply. For example, the external device can also act as an external power source for the implant. Further, where the prosthesis is a cochlear implant, the external device also preferably includes an external sound processor, such as a speech processor and operates in a similar manner  
 15 as a conventional device. The external sound processor can be used, for example, to provide the implantee with the option of using sound coding algorithms not supported by the internal implanted sound processor.

It is preferred that whenever the external power source is being used by the implantee, the implanted battery source will be disconnected from the  
 20 electrical equipment, such as the implant, by the switching means. As such, it is preferred that whenever external power is available it is utilised as the power source by the implant. To ensure this, the management means of the implanted power supply can preferably detect when an external coil has been placed adjacent the implanted coil and that external power is available to the  
 25 implant.

It is also preferred that whenever the external power source is being used by the implantee, the management system will review the output of the monitoring means and, if charging is required of a particular battery, ensure that charge is provided to allow recharging of at least that battery.

The management means is preferably adapted to only charge one of the  
 30 batteries when the charge in that battery has reached a predetermined minimum level or is fully discharged. Once charging of one of the batteries has commenced, the management means is preferably adapted to prevent use of that battery until such time as it is fully charged or has at least reached a  
 35 predetermined level of charge that is greater than the predetermined minimum level. Where one battery is fully discharged and the other battery

is being charged but has not reached full charge, the management means will preferably prevent the implant drawing power from the implanted power supply even when the external power source is removed or deactivated.

Once charging of one of the batteries is complete, the management  
 5 means will only commence charging of another battery if the charge level of said another battery is below a predetermined minimum level or is fully discharged.

When the batteries are fully charged, the management means is preferably adapted to stop further charging of the batteries. The management  
 10 means preferably, however, continues to ensure that the implant is powered by the external power source while ever it is in place.

The management means of the present invention is designed to maximise the life of the batteries within the implanted power supply. By ensuring that a battery is only charged when its level of charge has reached a  
 15 predetermined minimum level (eg. fully discharged) and is not used or discharged until its level of charge has reached a predetermined maximum level (eg. fully charged), the batteries are prevented from undergoing what is commonly known as shallow charging. It is known that shallow charging can significantly reduce the cycle life of a battery from fully charged to fully  
 20 discharged. By reducing or preventing shallow charging, the useable life of the batteries will be extended to the maximum potential term so extending the effective life of the implant.

#### Brief Description of the Drawings

By way of example only, a preferred embodiment of the invention is  
 25 now described with reference to the accompanying drawings, in which:

Fig. 1 is a pictorial representation of one example of a prior art cochlear implant system;

Fig. 2 is a is a plan view of an implantable housing for a cochlear implant that can use the power supply of the present invention;

30 Fig. 2a is a cross-sectional view of the housing through line A-A of Fig. 2;

Fig. 2b is a further cross-sectional view of the housing of Fig. 2 through line B-B; and

Fig. 3 is a flowchart depicting the possible operating states of the  
 35 battery management system of the power supply for the implant.

#### Preferred Mode of Carrying Out the Invention



Before describing the features of the present invention, it is appropriate to briefly describe the construction of one type of known cochlear implant system with reference to Fig. 1.

Known cochlear implants typically consist of two main components, an external component including an external housing containing a speech processor 39, and an internal component including an implanted receiver and stimulator unit 32. The external component includes a microphone 37. The speech processor 39 is, in this illustration, constructed and arranged so that it can be mounted on and fit behind the pinna 1. It will be understood that in an alternative version, the housing for the speech processor 39 and/or the microphone 37 may be worn on the body. Attached to the speech processor 39 is an external antenna coil 34 which transmits electrical signals to the implanted unit 32 via a radio frequency (RF) link.

The implanted component includes a receiver antenna coil 33 for receiving power and data from the transmitter coil 34. A cable 31 extends from the implanted receiver and stimulator unit 32 to the cochlea 2 and terminates in an electrode array 20. The signals thus received are applied by the array 20 to the basilar membrane 8 thereby stimulating the auditory nerve 9. The operation of such a device is described, for example, in US Patent No. 4532930.

One example of a tissue-stimulating prosthesis of the present invention is the totally implantable cochlear implant depicted generally as 40 in Fig. 2. This implant is capable of operation, at least for a period of time, as a single unit without reliance on componentry worn or carried external to the body of the implantee.

The implant 40 is adapted for implantation in the mastoid bone adjacent the ear of the implantee that is receiving the implant. The implant 40 has a similar geometry to a conventional implant unit, such as that described in US Patent 4532930. As such, surgical procedures similar to that used for conventional implants are envisaged to be used when implanting the current invention.

The implant 40 comprises a biocompatible, hermetically sealed titanium case 41 that houses the key electronic circuitry 44 of the implant 40. Also housed within the case 41 is a microphone 42 and a power supply 43. Prior to implantation, the case 41 is coated with a layer of silicone or parylene

that serves to further protect the implant. Such procedures are well known in the art and will not be further discussed in this application.

As previously mentioned, the case 41 is formed so as to minimise the need for bone excavation from the mastoid bone at implantation. Whilst the  
 5 actual dimensions of the case are not important to the understanding of the invention it should be appreciated that the case is designed so that the overall dimensions of the implant are substantially the same or marginally greater than those of a conventional implant. This design allows for similar surgical techniques to be employed during implantation of the current invention as  
 10 well as with the conventional implant.

In this particular embodiment, the microphone 42 is mounted adjacent the surface 45 of the case that faces outwardly following implantation of the case. The depicted microphone 42 is a directional dual cavity microphone but it is envisaged that other microphones could be employed in this system  
 15 which could perform an equal function. Use of such a microphone provides an effective means of rejecting common mode body-conducted noise emanating from body functions, such as chewing, respiration and blood flow. Whilst the preferred microphone 42 is an electret-type microphone, it will be appreciated that other microphone types could be utilised by the present  
 20 invention.

The electrode array used in the present invention can be identical to the array 20 known from the prior art. It is, however, preferred that the implant 40 use a Contour array as developed by Cochlear Limited in conjunction with corticosteroids to reduce the current required for  
 25 stimulation.

The implant 40 includes an antenna coil 46, which is attached externally of the casing 41. The depicted coil is a 3-turn electrically insulated platinum wire antenna coil. The electrical insulation for the antenna coil 46 is provided by a flexible silicone moulding. The antenna coil extends  
 30 externally from the case 41 as can be seen in Figure 1.

The antenna coil 46 is preferably disposed about a centrally located rare earth permanent magnet 47 that is held in the centre of the antenna coil 46 by the silicone moulding 48 surrounding the antenna coil 46. The provision of the magnet assists in the alignment of an external coil unit with  
 35 the implanted coil 46 via magnetic attractive forces, thereby providing for the system to be used as a conventional cochlear implant system when and if

required. The magnet 47 is preferably surgically removable so as to allow the implantee to undergo, if required, magnetic resonance imaging (MRI) scanning.

Electrical connection between the coil 46 and the componentry within the case 41 is provided by two hermetic and insulated ceramic feedthroughs. The coil 46 can act as an RF link to allow bidirectional data transfer between the implant 40 and external devices (described below). The coil 46 also acts as a power receiver and also provides a means of inductively charging the power supply 43 through the RF link.

The circuitry 44 within the case is preferably mounted on a flexible circuit board to allow for easier provision of the circuitry within the case 41. The circuitry 44 in the depicted embodiment includes a sound processor and a stimulation processor incorporated within a single integrated circuit.

The power supply 43 provides power for the microphone 42 and the electronic circuitry 44 housed within the case 41.

In the depicted embodiment, the power supply 43 incorporates two Lithium-ion cells. A greater number of cells could be incorporated in the power supply 43 if space constraints allowed their inclusion. It will be appreciated by persons skilled in the art that the type of cell chosen will depend greatly on the system requirements.

In the depicted embodiment, the power supply 43 is non-removable from the case 41. It will be appreciated that in other embodiments, the case could be modified to allow removal of the power supply by surgically accessing the case 41. In order to isolate the power supply 43 from the entire package, a thermal and electrical insulating material is provided between the supply 43 and the surrounding case 41.

The implant 40 has a management system that is designed to manage the power output by the power supply 43 to the implant 40 without the need for implantee intervention. The management system is set up to ensure that the cells are fully charged before use, and when they are used are not recharged until they have been fully discharged. The goal of the management system is to maximise cell life. In the depicted embodiment, the power supply management system incorporating a management means and switching means is incorporated in the electronic circuitry 44.

The electrical architecture of the circuitry 44 is based on a microcontroller adapted to perform the main control functions of the implant

40. The microcontroller provides overall supervision, configuration and control of the implant 40 and also performs the function of the stimulation processor. The stimulation processor performs the stimulation strategy process, stimulus level mapping and output control. The input to the  
 5 stimulation processor comes from either an internal signal processor in the implant 40 or an external sound processor, such as speech processor 39 depicted in Fig. 1. The output from the microcontroller provides the direction to stimulate the electrodes of the array.

The totally implantable cochlear implant 40 can be used in conjunction  
 10 with one or more external devices. One external device can be an external sound processor that is powered by an external battery and receives acoustic signals from an external microphone, such as microphone 37 depicted in Fig. 1. The output of the external speech processor is fed through the RF link provided in part by implanted coil 46 to the microcontroller. The external  
 15 speech processor might be used when the implanted processor is inactive for any reason, such as due to flat batteries or due to a malfunction. The external processor also provides the implantee with the option of using sound coding algorithms not supported by the internal speech processor.

A further external device that can be used with implant 40 is a battery  
 20 charger. The charger provides a means of inductively recharging the two batteries through the RF link provided in part by coil 46.

Fig. 3 is a flowchart depicting the states the management system of the power supply 43 passes through while the system is in the "PROVIDE HEARING" state. The flowchart is from the implantee's perspective. The  
 25 management system could be constructed incorporating a processor means and a switch device that constitutes part of or is under the control of the microcontroller. The processor means runs a loaded software program that allows it to control the status of the power supply 43 and the operation of the switch device to ensure that the implant 40 can draw power from the  
 30 appropriate cell of the power supply when appropriate. There are clearly other means by which such a function could be performed; such means may include dedicated analogue and digital electronic circuitry. The described means is merely an example of one particular method of operation.

The flowchart demonstrates that the goal of the management system is  
 35 to avoid shallow charging of either battery cell and to ensure that through correct usage of the device the internal power supply will always have

sufficient power to ensure that the device can operate as a stand-alone device if absolutely required.. The flowchart also demonstrates that the management system is set up to ensure that the implant 40 will use external power for its operation, at least for its sound processing, whenever it is available. Moreover, whenever the system is in the "COIL ON" state then that condition will be met. By "COIL ON", it is to be understood that an external coil connected to an external sound processor and power supply, as are known in the art, are being worn by the implantee.

As described, the depicted power supply 43 uses two cells. At any time, under normal operation, one cell is assigned to charging, and one to discharging. When one cell becomes discharged, and the other is fully charged, the roles are reversed. This path may be seen easily by following the bold line, which is the intended use path of the power supply 43.

A basic principle of the management system is that a cell must be fully charged before it can be discharged, and it must be fully discharged before it can be charged.

The flowchart is symmetric between the cells. The cells of the power supply 43 are identified by their numbers "0" and "1". Each state thus may have a "mirror" state where the cell numbers are interchanged. Out of each pair of mirror states, only one is described in the following text for the purposes of clarity.

Each cell can be in one of four (major) states, namely "FULL", "USE", "EMPTY" and "CHARGING". A cell will cycle between these states in this order.

The management system has two clear rules governing the state transitions of the cells:-

1) cells cannot be charged when external power is not available (ie. when the external coil is not being worn or "COIL OFF").

2) cells should not be used, ie. discharged, when external power is available (ie. when the external coil is being worn or "COIL ON").

The flowchart has an entry point but no exit point - as the power supply is adapted to operate in an endless cycle.

In the flowchart, the symbol "#" is used to indicate that a cell is in a given state (eg charging) but that that function is suspended for some reason (eg the external coil is not being worn). A cell state can thus be written in the form:

"0 {Optional negation} (State) 1 {Optional negation} (State)"

where (State) can be one of "FULL", "USE", "EMPTY" and "CHARGING".

For example, "0 USE 1 #CHARGING" indicates that cell 0 is being used, and 1 is available for charging but that this is not possible for some reason

5 (presumably because the external coil is not being worn).

For the purposes of following the flowchart, it is assumed that initially cell 0 is fully charged and in USE (ie. the switch device is set such that the implant 40 is drawing power from cell 0) while cell 1 is EMPTY and is capable of being charged but is not being charged because the external coil is not being worn. This condition is represented by state 10 "0 USE 1 #CHARGING".

The power supply 43 remains in state 10 until one of two actions occur. The first is where the implantee has used the implant 40 to the point where 0 cell has less than one day's use left (represented by the acronym 15 "NODU" for "Not one day's use left"). In this case, the management system issues a warning indication (ie. "NODU Msg" to the implantee (such as an audible tone) and moves into state 21 "0 USE (NODU) 1 #CHARGING" which is discussed below.

The second action that can be taken is that the implantee attaches the 20 external coil and commences use of the external power supply for the implant 40. In this case, the management system operates the switch device and disconnects cell 0 of the power supply and allows cell 1 to be charged whilst the external power supply also provides the power to operate the device in the same way as a conventional implant, so moving the power 25 supply into state 11 "0 #USE 1 CHARGING", ie. cell 1 is being charged and cell 0 is available for use but this is blocked as external power is available.

If the external coil is then removed, the management means again operates the switch device and the power supply reverts to state 10 as indicated in the flowchart. If cell 1 becomes fully charged, the power supply 30 moves to state 12 "0 #USE 1 FULL". This describes a state where the implantee has attached the coil, cell 0 is available for use, but this is blocked because external power is available, and cell 1 is fully charged and so is not charged even though power is available through the external coil.

State 12 is left if the external coil is removed and the power supply 35 moves to state 13 "0 USE 1 FULL" (ie. a state where cell 0 is being used, and cell 1 is full). In moving from state 12 to state 13, the management system

operates the switch device to allow the implant 40 to draw power from cell 0. The management system also outputs an indication (eg. "Battery full msg") indicating to the implantee that the cell is full. A suitable message might be in the form of a short sound, such as a beep.

- 5        Once in state 13, the power supply 43 can provide power to the implant 40 for a period dependent on the amount of charge in cell 0. This could last for several days.

      The power supply 43 can revert to state 12 if the external coil is again worn by the implantee. Otherwise, state 13 is left when the "in use" cell 0 is discharged as indicated by state 14 "0 EMPTY 1 FULL". State 14 is a  
10        transitional state as 0 cell is not available for use as it is empty, and if cell 1 is used at all it immediately ceases to be full. At this point in the flowchart, the roles of the cells within the system are swapped.

- State 14 is left upon the assignment by the management system of cell  
15        1 for use, and cell 0 for charging and the power supply so moves to state 15 "0 #CHARGING 1 USE". In this state, cell 0 is not charged as the external coil is not being worn. It will be appreciated that state 15 is the mirror of state 10 "0 USE 1 #CHARGING". If the external coil is again worn by the implantee, the power supply moves to state 16 "0 CHARGING 1 #USE". The power  
20        supply 43 reverts to state 15 if the external coil is removed before 0 cell is fully charged. Once 0 cell is fully charged, the power supply shifts to state 17 "0 FULL 1 #USE" where the implant 40 is powered by the external power supply and no charging of either cell occurs.

- If the external coil is removed after the power supply 43 has moved to  
25        state 17, the power supply shifts to state 18 "0 FULL 1 USE". When initially shifting to state 18, the power supply outputs an indication (eg. "Battery full msg") indicating to the implantee that the cell is full. A suitable message again might be in the form of a short sound, such as a beep.

- If the external coil is reattached, the power supply shifts back to state  
30        17 where the external coil is used to power the implant 40 and no charging occurs. Once in state 18, the power supply 43 can provide power to the implant 40 for a period dependent on the amount of charge remaining in cell 1. This could last for several days.

- State 18 is left when the "in use" cell (cell 1) is discharged as indicated  
35        by state 19 "0 FULL 1 EMPTY". State 19, like state 14, is a transitional state as cell 1 is not available for use as it is empty, and if cell 0 is used at all it

immediately ceases to be full. Accordingly, at this point, the power supply has returned to state 10 ready to repeat the cycle as required.

The cycle described above is the normal power cycle for the power supply. This describes the status path taken by the power supply 43 day-to-day. It is designed for implantees who want to keep their cell charged using a daily cycle, that they can fit into their lifestyle. For example, charging could occur while driving the car to work and back. In summary, the implantee is required to wear an external speech processor (or external battery charger) for a certain number of hours per day (on average), and the management system ensures that the appropriate cell is charged when appropriate. Such a system has significant advantages over an implant having a single cell as the implantee has to schedule times to charge the cell. These times have to fit with the times when the cell is flat rather than being at the convenience of the implantee, if the implantee is to avoid shallow charging the cell in their implant. Therefore, if the implantee sets aside a specified time period each day to wear an external unit (with the implant functioning as a traditional implant during this time) then the charging function is managed automatically by the implant itself without the need for implantee input.

As was briefly described above, the power supply 43 can enter an abnormal power cycle if insufficient power is provided to the implant 40 to allow it to use its normal power cycle. As described above, if the implantee uses the implant 40 with the external coil detached (eg State 10 "0 USE 1 #CHARGING") then the 0 cell will eventually discharge until the point is reached where it no longer has enough power to sustain one day's use. The implant then sends the "not one day's use" (NODU) message to the implantee. This is done by generating a "beep" with an easily recognisable characteristic or possibly a simulated voice warning of this condition. Such a message is also generated if the implantee disconnects the external coil (ie. speech processor or cell charger) before cell 1 is fully charged and is available for use when the external coil is removed.

Once the NODU message has been generated, the power supply moves to state 21 "0 USE (NODU) 1 #CHARGING". In this state, the implant 40 is operational but the cell has less than one day's use available, so will shut down after some time.

State 21 is left by one of two paths. Firstly, state 21 can be left when 0 cell no longer has sufficient charge to sustain power to the implant 40. In



this case, the power supply moves to state 22 "0 EMPTY 1 #CHARGING". State 22 is a "silent state" where the implant 40 is non-operational. It will be appreciated that while in state 22, 0 cell is regarded as empty, the power supply 43 may have sufficient power to power certain processor functions,

5 such as maintain any loaded programs.

The power supply can move from state 22 to state 23 "0 EMPTY 1 CHARGING" when an external coil is attached so that charging can begin. State 22 may be re-entered if the coil is detached before the cell 1 is fully charged and is available for use.

10 State 21 can also be left if the implantee on hearing the NODU message decides to charge the cell by wearing the external coil (ie. speech processor or battery charger). In this case, the power supply moves to state 24 instead "0 #USE (NODU) 1 CHARGING". While in state 24, the "in use" cell still has less than one day's use, so this state is distinct from other charging states.

15 State 24 is left when cell 1 is full and so can be assigned for use. In this case, the power supply moves back to state 12 and is back in the normal power cycle.

If the power supply is in state 23 "0 EMPTY 1 CHARGING", the power supply will remain in this state while the external coil is attached until 1 cell is full, ie state 25 "0 CHARGING 1 FULL". If the external coil remains attached for a sufficient period of time, the power supply moves into state 26 "0 FULL 1 FULL". Once in this state, the management system can switch 0 cell to not in use and so the power supply reverts to state 12 in the normal power cycle.

20

25 If the external coil is removed while the power supply is in state 25, the power supply shifts to state 15 with the power supply using cell 1 to provide power to the implant 40.

Careful inspection of the flowchart reveals that if the implantee ignores either instance where the NODU message is generated, then one cell receives one more charge/discharge cycle than the other. This will result in asymmetric use of the cells. While undesirable, it is envisaged that over the life of the power supply (eg. 1000 or more charge/discharge cycles) this should balance out. It will be appreciated that ideally the two cells should be used symmetrically, so they wear out at the same rate. Asymmetric use of the cells could be avoided by exiting state 26 "0 FULL 1 FULL" and entering state 17 "0 FULL 1 #USE" (the mirror state of state 12).

30

35

It will be appreciated from a review of the flowchart that the management system for the power supply ensures that hearing is provided both when the external device is attached or detached (so long as at least one cell is charged). This allows the implantee to interrupt charging if it is not  
5 convenient without the danger of causing shallow charging of the power supply.

It will be appreciated by persons skilled in the art that numerous variations and/or modifications may be made to the invention as shown in the specific embodiments without departing from the spirit or scope of the  
10 invention as broadly described. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive.

15  
20  
25  
30  
35

40  
45  
50  
55  
60

## THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A power management system for a power supply providing power to electrical equipment, the power supply comprising a first rechargeable  
5 battery and at least one further rechargeable battery, with each battery independently providing power to the electrical equipment through a switching means, wherein the management system comprises a management means for controlling the operation of the switching means to place the system in a first state where the electrical equipment draws power from only  
10 the first battery or at least in a further state where the electrical equipment draws power from only said at least one further battery.
2. A power management system of claim 1 wherein the switching means is operable by the management means to place the system in another state  
15 where the electrical equipment does not draw power from said first or said at least one further battery of the power supply.
3. A power management system of claim 2 wherein the switching means is operable by the management means to place the system in said another  
20 state when a different power source to said power supply is providing power for the electrical equipment.
4. A power management system of any one of the preceding claims wherein the management means only allows power to be drawn from one of  
25 said first and said at least one further batteries after said one battery has been fully charged or has a pre-determined maximum level of charge.
5. A power management system of any one of the preceding claims wherein the management means only allows one of said first and said at least  
30 one further batteries to be charged after that battery has reached a predetermined minimum level of charge.
6. A power management system of claim 5 wherein said one battery is only charged after that battery has been fully discharged.

7. A power management system of claim 1 wherein when the system is in said first state, said at least one further battery is rechargeable.

8. A power management system of claim 1 wherein when the system is in said at least one further state, said first battery is rechargeable.

9. A power management system of any one of the preceding claims wherein the system has a first rechargeable battery and one of said at least one further rechargeable batteries.

10

10. A power management system of any one of the preceding claims wherein said electrical equipment is a tissue-stimulating prosthesis adapted for implant in an implantee's body.

11. A power management system of claim 10 wherein said tissue-stimulating prosthesis is a cochlear implant.

12. A power management system for a power supply providing power to a cochlear implant, the power supply comprising a first rechargeable battery and at least one further rechargeable battery, with each battery independently providing power to the cochlear implant through a switching means, wherein the management system comprises a management means for controlling the operation of the switching means to place the system in a first state where the cochlear implant draws power from only the first battery or at least in a further state where the cochlear implant draws power from only said at least one further battery.

13. A power management system for a power supply providing power to electrical equipment, the power supply comprising a first rechargeable battery and at least one further rechargeable battery, with each battery independently providing power to the electrical equipment through a switching means, the management system comprising a management means for controlling the operation of the switching means to place the system in a first state where the electrical equipment draws power from only the first battery or at least in a further state where the electrical equipment draws power from only said at least one further battery, and wherein when the

system is in said first state, said at least one further battery is rechargeable, and when the system is in said at least one further state, said first battery is rechargeable.

- 5 14. A power management system for a power supply providing power to electrical equipment, the power supply comprising a first rechargeable battery and at least one further rechargeable battery, with each battery independently providing power to the electrical equipment through a switching means, the management system comprising a management means  
10 for controlling the operation of the switching means to place the system in a first state where the electrical equipment draws power from only the first battery or at least in a further state where the electrical equipment draws power from only said at least one further battery, and wherein the management means only allows power to be drawn from one of said first  
15 battery and said at least one further battery after said one battery has been fully charged or has a pre-determined maximum level of charge.
15. A power management system of claim 14 wherein the management means only allows one of said first battery and said at least one further  
20 battery to be charged after that battery has reached a predetermined minimum level of charge.
16. An implantable tissue-stimulating prosthesis that draws electrical power from a power supply that is implantable with or in the prosthesis, the  
25 power supply including a first rechargeable battery and at least one further rechargeable battery, with each battery independently providing power to the prosthesis through a switching means, the prosthesis having a power management system for the power supply, wherein the management system comprises a management means for controlling the operation of the switching  
30 means to place the system in a first state where prosthesis draws power from only the first battery or at least in a further state where the prosthesis draws power from only said at least one further battery.
17. An implantable tissue-stimulating prosthesis of claim 16 wherein the  
35 prosthesis is a cochlear implant.

18. An implantable tissue-stimulating prosthesis of claim 17 wherein the cochlear implant is totally implantable and comprises a microphone that detects external sounds and outputs acoustic signals representative of detected sounds, a processor means that receives the acoustic signals and  
5 converts the signals into stimulation signals representative of the detected sounds and an electrode array suitable for insertion in the cochlea of an implantee that receives the stimulation signals and transmits electrical stimulations to the implantee's auditory nerves.
- 10 19. An implantable tissue-stimulating prosthesis of claim 18 wherein the power supply comprises said first battery and one said at least one further battery.
20. An implantable tissue-stimulating prosthesis of claim 19 wherein the  
15 management means further comprises a charge monitoring means that monitors the charge in the first battery and said at least one further battery.
21. An implantable tissue-stimulating prosthesis of claim 20 wherein when  
20 the charge of the first battery is monitored by the monitoring means to have reached predetermined minimum level, or is fully discharged, the monitoring means outputs a signal indicative that the charge has reached this minimum level.
22. An implantable tissue-stimulating prosthesis of claim 21 wherein the  
25 output signal is provided to the management means which operates the switching means to switch the power supply for the implant from the first battery to said at least one further battery.
23. An implantable tissue-stimulating prosthesis of claim 22 wherein at the  
30 same time that the monitoring means is monitoring the first battery, it can also monitor the charge in said at least one further battery.
24. An implantable tissue-stimulating prosthesis of claim 23 wherein when  
35 the monitoring means detects that the charge in the first battery has reached a predetermined minimum level or is approaching full discharge, and there is no charge in said at least one further battery, the monitoring means outputs a

signal to the management means which in turn generates a warning indication to the implantee that the power supply of the implant needs recharging.

5 25. An implantable tissue-stimulating prosthesis of claim 24 wherein the warning system is a unique stimulus signal that the implantee is trained to recognise as indicative that the power supply needs recharging.

26. An implantable tissue-stimulating prosthesis of claim 24 wherein the  
10 management system further comprises an interrogation means that allows the implantee to determine the measured charge levels noted by the monitoring means.

27. An implantable tissue-stimulating prosthesis of claim 19 wherein the  
15 first battery and said at least one further battery comprise Lithium-Ion cells.

28. An implantable tissue-stimulating prosthesis of claim 19 wherein the cochlear implant further comprises a wire antenna coil that is implantable within the implantee.

29. An implantable tissue-stimulating prosthesis of claim 28 wherein a  
20 battery charging means is mountable external to the body of the implantee and adapted to recharge the first battery and said at least one further battery of the power supply.

30. An implantable tissue-stimulating prosthesis of claim 29 wherein the  
25 battery charging means is useable in conjunction with an external device comprising at least an external speech processor.

31. An implantable tissue-stimulating prosthesis of claim 17 wherein the  
30 implant is useable in concert with a device externally mountable to the implantee.

32. An implantable tissue-stimulating prosthesis of claim 31 wherein the  
35 externally mountable device comprises a speech processor and/or an external power supply.

33. An implantable tissue-stimulating prosthesis of claim 32 wherein the management means further comprises a sensing means that senses when the externally mounted device, incorporating an external power supply, is  
5 brought into use.

34. An implantable tissue-stimulating prosthesis of claim 33 wherein on sensing of the availability of the external power supply by the sensing means, the cochlear implant draws all of its electrical power requirement from the  
10 external supply.

35. An implantable tissue-stimulating prosthesis of claim 33 wherein the sensing means can detect removal of the external power supply and provide a suitable output to the cochlear implant that instructs it to draw power from  
15 the internal implanted power supply, if power is available.

Dated this twenty sixth day of September 2001

Cochlear Limited


Patent Attorneys for the Applicant:

F B RICE & CO



3709001 78073

1/3

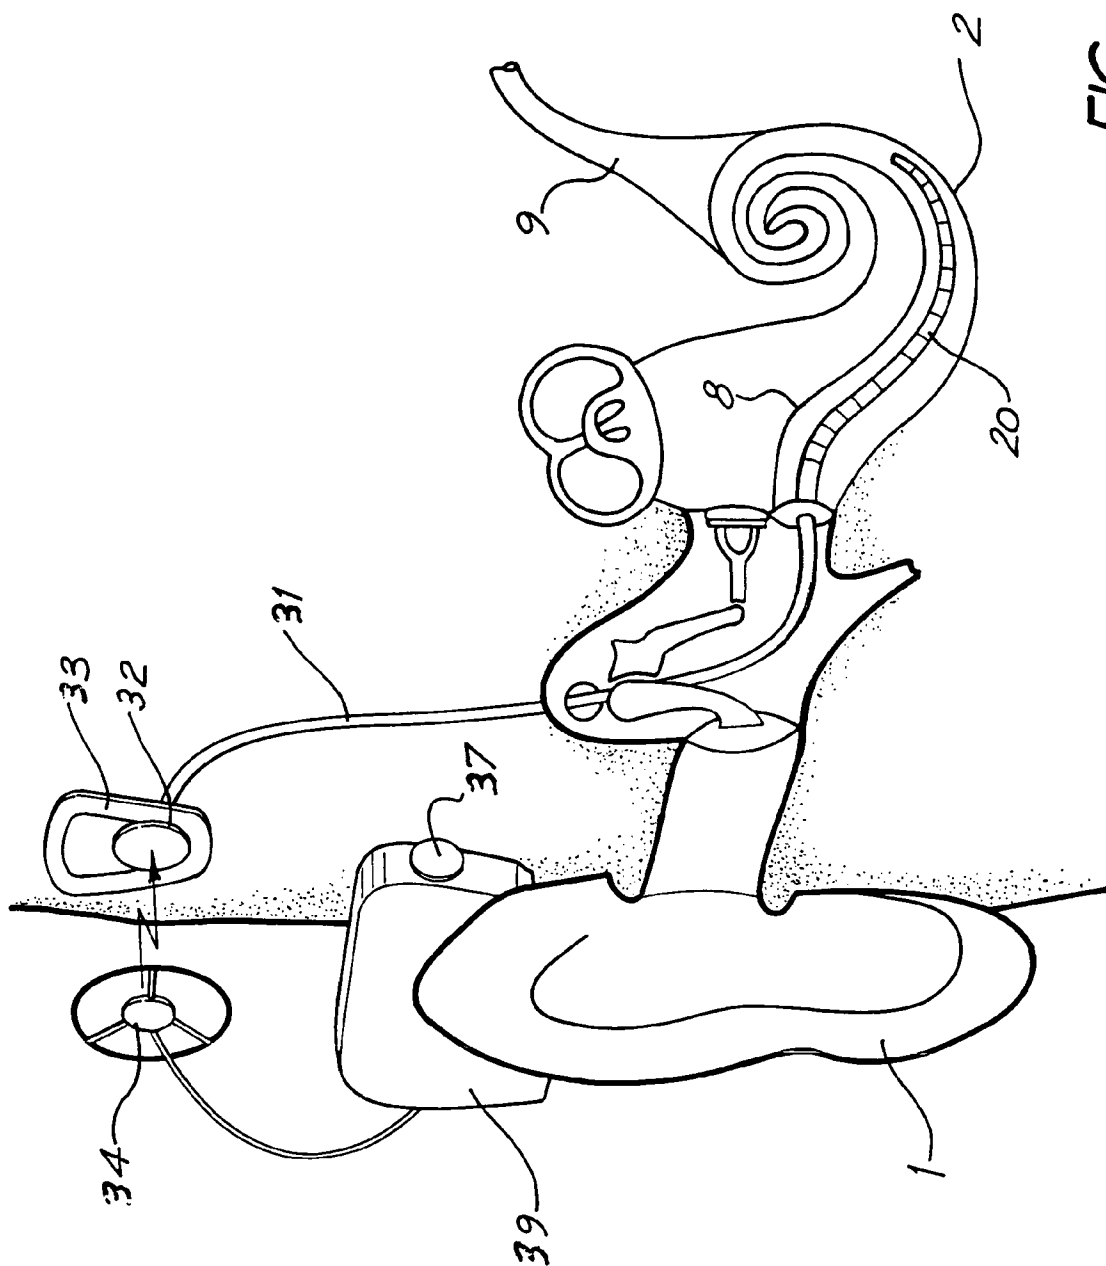

2/3

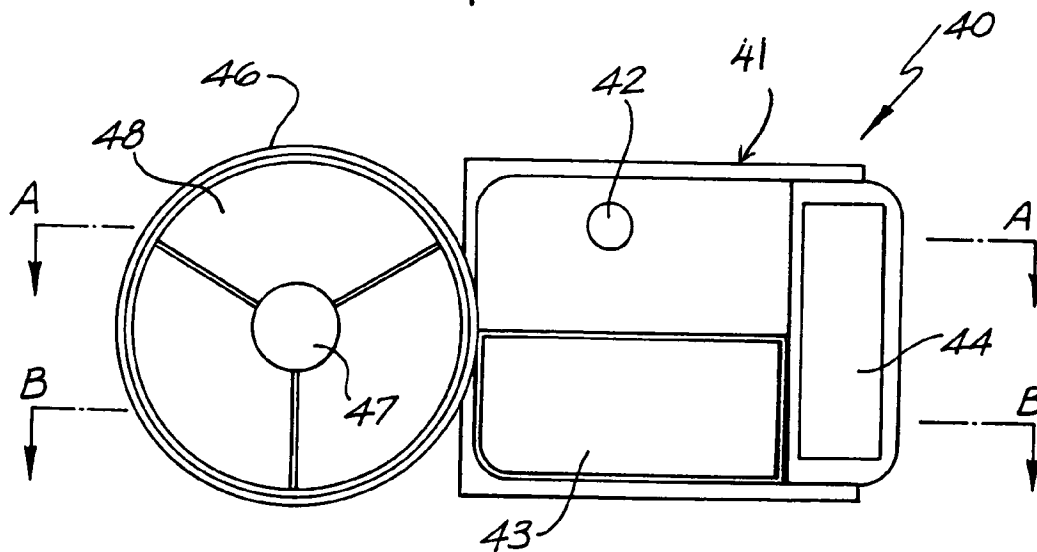


FIG. 2

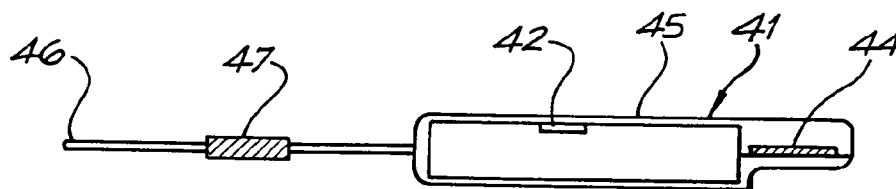


FIG. 2a

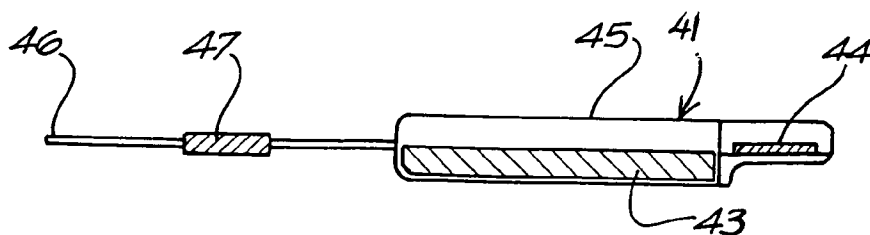


FIG. 2b



Fig. 3